




TECHNIK FÜR LAND UND HOF

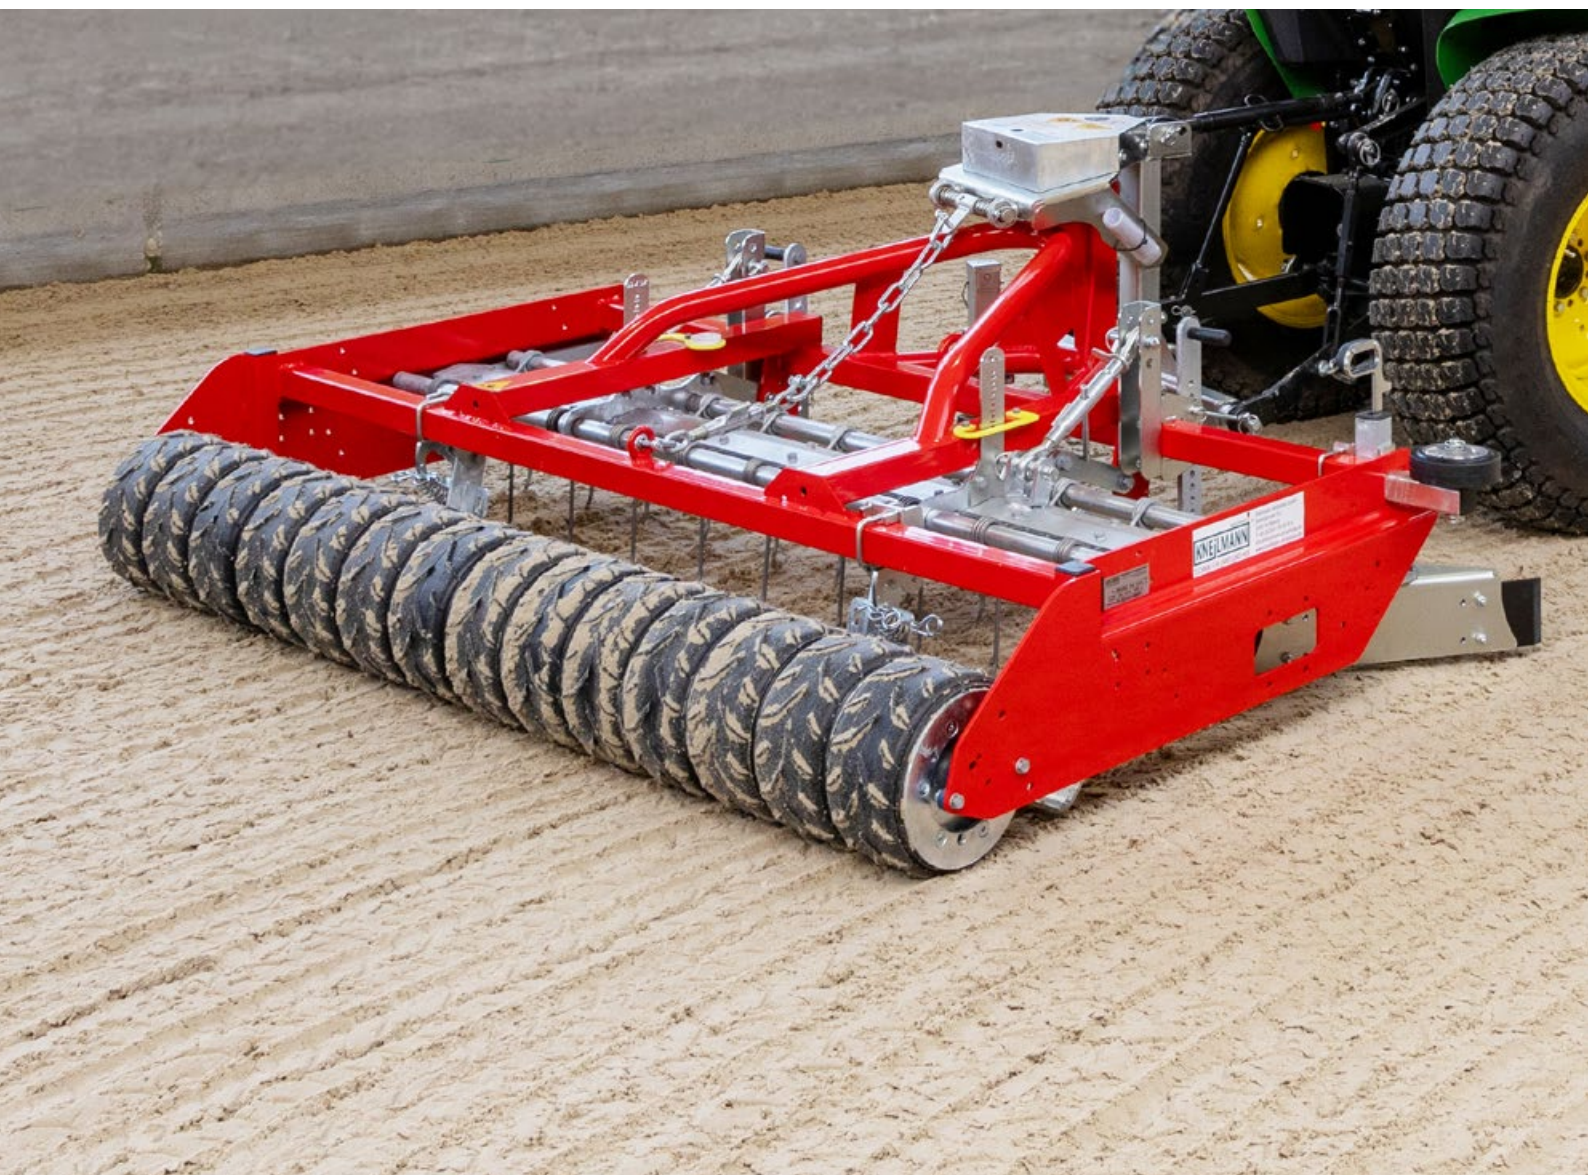

CATALOGUE 2025

QUALITY DEVICES
for riding and breeding facilities



WELCOME!

ALL THE BEST FOR YOUR WORK

Since its founding, Kneilmann Gerätebau, named for its founder, Theo Kneilmann, has stood for reliable service, premium quality, personal customer care, and customised professional consultation.

And we made sure that this would continue when the company was passed down to a new generation in 2012.

We are a modern business and one of the leading manufacturers of farm and stable equipment in all of Europe. Our vast experience and the continued development of our products are the foundations for enduring customer satisfaction as well as success for our partners – sustainably and long-term.

From our company's earliest days, we have concentrated on the manufacture, marketing and sales of our versatile, high-quality products – always combined with in-depth expert advice for maximum customer benefit.

Our experienced and competent staff are available to answer any questions you may have.

We're confident our products will contribute to your success!

Sincerely,

André Keute

TABLE OF CONTENTS

Arena Drag Type 1 Traditional	06
Arena Drag Type 2 Professional	08
Arena Drag Type 3 Extrem	10
Arena Drag Accessories & Parts Types 1–3	12
Arena Drag Type 4 Xpert	14
Smoothing bar for Arena Drag Type 4+5	16
Arena Drag Type 5 Premium	18
Arena Drag Type 5 Premium	20
Arena Drag Accessories & Parts Types 4–5	22
Stainless Steel Feed Wagon & Accessories	24
Stainless Steel Manure Cart	26
Manure Container	28
Bale Carrier Traditional & Accessories	30
Bale Carrier Professional & Accessories	32
Bale Carrier with Scale	34
Riding Bale Carrier	36

Saddle Cart	38
Riding arena mirror	40
Automatic Feeder, Stainless Steel	42
Feed trough, Stainless Steel	44
Solariums	46
Heated Horse Rug Dryer	48
Blanket holder	50
Circular Feeder	52
TeMax Battery-Powered Dumper	54
Paddock Cleaner	56
Mobile Paddock	58
Equiground Paddock Grids	60
BELMONDO Rubber Flooring	62
Rubber Cobblestone Flooring	64
Dumping Wheelbarrow & Accessories	66
Pitchfork	68
Zaunkönig Post Mower	70
Mounting Frame	72

SUITABLE FOR SAND FOOTING:

ARENA DRAG TYPE 1 TRADITIONAL



Configure online
now!



This quality arena drag is made of sturdy powder-coated steel tube frame. The Type 1 Traditional Arena Drag is suitable for sand footing.



ATTACHMENT FOR TRACTOR CAT. 1 / 2

B114 – B130

- » Hitch to tractors CAT. 1 / 2
- » Powder-coated in red
- » Height-adjustable tines
- » Working width 1.40 m – 3.00 m




Designation	Width	Weight
B114	1.40 m	160 kg
B116	1.60 m	174 kg
B118	1.80 m	184 kg
B120	2.00 m	202 kg
B122	2.25 m	220 kg
B125	2.50 m	240 kg
B127	2.75 m	270 kg
B130	3.00 m	288 kg

WITH QUAD HITCH, MECHANICAL SWIVEL AXLE

B1QM14 – B1QM25

- » Hitch to ATV / wheel-loader / car
- » Mechanical swivel axle for riding on roads with hydraulic hand pump
- » Powder-coated in red
- » Height-adjustable tines
- » Working width 1.40 m – 2.50 m



Designation	Width	Weight
B1QM14	1.40 m	222 kg
B1QM16	1.60 m	236 kg
B1QM18	1.80 m	250 kg
B1QM20	2.00 m	264 kg
B1QM22	2.25 m	282 kg
B1QM25	2.50 m	302 kg

WITH QUAD HITCH, HYDRAULIC SWIVEL AXLE

B1QH14 – B1QH30

- » Hitch to quad / wheel-loader / car
- » Hydraulic swivel axle for riding on roads
- » Powder-coated in red
- » Height-adjustable tines
- » Working width 1.40 m – 3.00 m



Designation	Width	Weight
B1QH14	1.40 m	212 kg
B1QH16	1.60 m	226 kg
B1QH18	1.80 m	240 kg
B1QH20	2.00 m	254 kg
B1QH22	2.25 m	272 kg
B1QH25	2.50 m	292 kg
B1QH27	2.75 m	324 kg
B1QH30	3.00 m	342 kg

FOR FLEECE, GEOTEXTILE, AND SAND FOOTING:

ARENA DRAG TYPE 2 PROFESSIONAL



Configure online
now!



This quality arena drag is made of sturdy powder-coated steel tube frame. The Type 2 Professional Arena Drag is suitable for fleece, geotextile and sand footing.



ATTACHMENT FOR TRACTOR CAT. 1 / 2 B214 – B230


- » Hitch to tractors CAT. 1 / 2
- » With spring-loaded centre bar
- » Can also be used with wood chips or shavings
- » Powder-coated in red
- » Height-adjustable tines
- » Working width 1.40 m – 3.00 m



Designation	Width	Weight
B214	1.40 m	163 kg
B216	1.60 m	175 kg
B218	1.80 m	188 kg
B220	2.00 m	201 kg
B222	2.25 m	217 kg
B225	2.50 m	239 kg
B227	2.75 m	266 kg
B230	3.00 m	282 kg

WITH QUAD HITCH, MECHANICAL SWIVEL AXLE B2QM14 – B2QM25


- » Hitch to quad / wheel-loader / car
- » With spring-loaded centre bar
- » Can also be used with wood chips or shavings
- » Mechanical swivel axle for riding on roads with hydr. hand pump
- » Powder-coated in red
- » Height-adjustable tines
- » Working width 1.40 m – 2.50 m



Designation	Width	Weight
B2QM14	1.40 m	223 kg
B2QM16	1.60 m	239 kg
B2QM18	1.80 m	249 kg
B2QM20	2.00 m	262 kg
B2QM22	2.25 m	278 kg
B2QM25	2.50 m	300 kg

WITH QUAD HITCH, HYDRAULIC SWIVEL AXLE B2QH14 – B2QH30

- » Hitch to quad / wheel-loader / car
- » With spring-loaded centre bar
- » Can also be used with wood chips or shavings
- » Hydraulic swivel axle for riding on roads
- » Powder-coated in red
- » Height-adjustable tines
- » Working width 1.40 m – 3.00 m



Designation	Width	Weight
B2QH14	1.40 m	213 kg
B2QH16	1.60 m	229 kg
B2QH18	1.80 m	239 kg
B2QH20	2.00 m	252 kg
B2QH22	2.25 m	268 kg
B2QH25	2.50 m	290 kg
B2QH27	2.75 m	320 kg
B2QH30	3.00 m	337 kg

FOR SPORTS FIELDS / WATERBOUND PAVEMENT:


ARENA DRAG TYPE 3 EXTREM



Configure online
now!



This quality arena drag is made of sturdy powder-coated steel tube frame. The Type 3 Extrem Area Drag is suitable for hard surfaces / water-bound pavements and cinder tracks (e.g. sports fields).

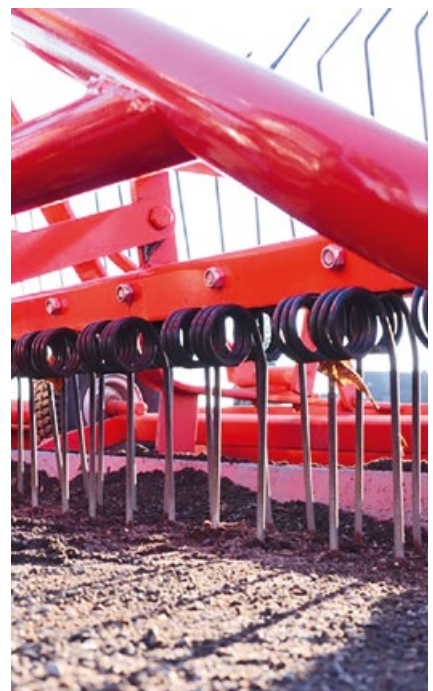

ATTACHMENT FOR TRACTOR CAT 1 / 2 B314 – B330

- » Hitch to tractors CAT. 1 / 2
- » Trailing brush / flexible tines
- » Powder-coated in red
- » Height-adjustable double-rowed flexible tines
- » Working width 1.40 m – 3.00 m



Designation	Width	Weight
B314	1.40 m	176 kg
B316	1.60 m	185 kg
B318	1.80 m	198 kg
B320	2.00 m	210 kg
B322	2.25 m	223 kg
B325	2.50 m	248 kg
B327	2.75 m	272 kg
B330	3.00 m	298 kg

WITH QUAD HITCH, MECHANICAL SWIVEL AXLE B3QM14 – B3QM25

- » Hitch to quad / wheel-loader / car
- » Trailing brush / flexible tines
- » Mechanical swivel axle for riding on roads with hydr. hand pump
- » Powder-coated in red
- » Height-adjustable double-rowed flexible tines
- » Working width 1.40 m – 2.50 m



Designation	Width	Weight
B3QM14	1.40 m	219 kg
B3QM16	1.60 m	236 kg
B3QM18	1.80 m	247 kg
B3QM20	2.00 m	264 kg
B3QM22	2.25 m	275 kg
B3QM25	2.50 m	297 kg

WITH QUAD HITCH, HYDRAULIC SWIVEL AXLE B3QH14 – B3QH30

- » Hitch to quad / wheel-loader / car
- » Trailing brush / flexible tines
- » Hydraulic swivel axle for riding on roads
- » Powder-coated in red
- » Height-adjustable double-rowed flexible tines
- » Working width 1.40 m – 3.00 m



Designation	Width	Weight
B3QH14	1.40 m	221 kg
B3QH16	1.60 m	246 kg
B3QH18	1.80 m	257 kg
B3QH20	2.00 m	274 kg
B3QH22	2.25 m	285 kg
B3QH25	2.50 m	307 kg
B3QH27	2.75 m	325 kg
B3QH30	3.00 m	341 kg

FOR ARENA DRAG TYPES 1 – 3:

ARENA DRAG ACCESSORIES AND PARTS



TRAILER CONVERSION

This robust conversion allows the arena drag to follow behind the pull vehicle for a near-true track.

Designation	Dimensions (L x W x H)	Weight
NLE	70 x 90 x 70 cm	70 kg



FLEXIBLE TINES

For the rear row of tines on arena drags Type 1, Type 2, and Type 3.

Designation	Dimensions (L x W)	Weight
FDZ	31 x 9 cm	0.5 kg



S-TINES

For the front row of tines on arena drags Type 1 and Type 2.

Designation	Dimensions (L x W)	Weight
GEZ	35 x 3 cm	1.3 kg



RAIL BLADE

Designation	Dimensions (L x W x H)	Weight
HSR	60 x 37 x 37 cm	19.25 kg



WALL WHEEL

To attach to the rail blade or for new machines.

Designation	Dimensions (L x W)	Weight
BDR	Ø 15 cm	3 KG



SPARE TYRE FOR QUAD DRAG

Spare tyre for the swivel unit on quad drags.

Designation	Dimensions (L x W)	Weight
BQR	Ø 31 cm	2.15 kg



FOR FLEECE AND GEOTEXTILE FOOTINGS, WITH RUBBER ROLLER:

ARENA DRAG TYPE 4 XPERT



Configure online
now!




The Type 4 XPERT Arena Drag is suitable for arenas with fleece, geotextile, and sand footing. Two rows of adjustable flexible tines and the robust Farmflex roller ensure optimum results on your arena or indoor school.



ATTACHMENT FOR TRACTOR CAT 1 / 2

B416 - B425

- » Hitch to tractors CAT. 1 / 2
- » 2-rowed harrow and Farmflex roller
- » With conversion incl. automatic centre locking
- » Powder-coated in red
- » Working width 1.60 m - 2.50 m




Designation	Width	Weight
B416	1.60 m	311 kg
B418	1.80 m	330 kg
B420	2.00 m	349 kg
B422	2.20 m	368 kg
B425	2.50 m	387 kg

WITH QUAD HITCH, MECHANICAL SWIVEL AXLE

B4QM16 - B4QM20

- » Hitch to quad / wheel-loader / car
- » Mechanical swivel axle for riding on roads with hydr. hand pump
- » 2 rows of height-adjustable tines and Farmflex roller
- » Powder-coated in red
- » Working width 1.60 m - 2.00 m




Designation	Width	Weight
B4QM16	1.60 m	298 kg
B4QM18	1.80 m	357 kg
B4QM20	2.00 m	395 kg

WITH QUAD HITCH, HYDRAULIC SWIVEL AXLE

B4QH16 - B4QH22

- » Hitch to quad / wheel-loader / car
- » Hydraulic swivel axle for riding on roads
- » 2 rows of height-adjustable tines and Farmflex roller
- » Powder-coated in red
- » Working width 1.60 m - 2.20 m



Designation	Width	Weight
B4QH16	1.60 m	290 kg
B4QH18	1.80 m	349 kg
B4QH20	2.00 m	387 kg
B4QH22	2.20 m	405 kg

THE PERFECT HELPER FOR A SMOOTH RESULT:

SMOOTHING BAR FOR RIDING ARENA DRAG TYPE 4+5



The smoother stands for the arena drag TYPE 4 XPERT (rubber roller) and TYPE 5 PREMIUM (mesh roller) available on fleece, geotextile and sand soils. It ensures a perfectly smooth work result on your riding arena or indoor riding arena.



SMOOTHING BAR FOR TYPE 4+5

- » double-acting control unit required
- » galvanized

Designation	Width
NG16	1,60 m
NG18	1,80 m
NG20	2,00 m
NG22	2,20 m
NG25	2,50 m

HAND PUMP FOR TYPE 4+5

- » double-acting
- » including tank and hand lever

Designation

Hand pump Type 4+5



FOR SAND / FLEECE MIXES, WITH MESH ROLLER:

ARENA DRAG TYPE 5 PREMIUM



Configure online
now!




The Premium Arena Drag is not only effective when used on various footings, it also sets new standards in handling and workmanship. This arena drag was specially developed to smooth out uneven and solidified fleece and geotextile footings and is built with a working width of 1.50 to 2.50 m.



ATTACHMENT FOR TRACTOR CAT 1 / 2

B516 – B525

- » Hitch to tractors CAT. 1 / 2
- » 2 rows of tines and mesh roller with screw conveyor
- » With conversion incl. automatic centre locking
- » Powder-coated in red
- » Working width 1.60 m – 2.50 m




Designation	Width	Weight
B516	1.60 m	285 kg
B518	1.80 m	290 kg
B520	2.00 m	300 kg
B522	2.20 m	315 kg
B525	2.50 m	363 kg

WITH QUAD HITCH, MECHANICAL SWIVEL AXLE

B5QM12 – B5QM22

- » Mechanical swivel axle for riding on roads with hydraulic hand pump
- » 2 rows of height-adjustable tines
- » 3 tine rows on models up to 1.45 m
- » Mesh roller with screw conveyor
- » Powder-coated in red
- » Working width 1.60 m – 2.20 m




Designation	Width	Weight
B5QM16	1.60 m	295 kg
B5QM18	1.80 m	320 kg
B5QM20	2.00 m	330 kg
B5QM22	2.20 m	340 kg

WITH QUAD HITCH, HYDRAULIC SWIVEL AXLE

B5QH16 – B5QH22

- » Hydraulic swivel axle for riding on roads
- » 2 rows of height-adjustable tines
- » Mesh roller with screw conveyor
- » Powder-coated in red
- » Working width 1.60 m – 2.20 m



Designation	Width	Weight
B5QH16	1.60 m	268 kg
B5QH18	1.80 m	322 kg
B5QH20	2.00 m	340 kg
B5QH22	2.20 m	350 kg

FOR FLOORS MADE OF SAND / FLEECE MIX, WITH GRID ROLLER:

ARENA DRAG TYPE 5 PREMIUM



Configure online
now!




The premium planer is not only highly effective when used on a wide variety of floors, but also sets standards in terms of handling and processing. Due to the somewhat lighter construction, this planner can also be taken along by smaller towing vehicles with limited power.



This riding arena leveler was specially developed for the care and smoothing of uneven and hardened fleece, geotextile floors and is built in working widths of 1.45m to 1.60 m. The ideal entry-level device in the field of roller levellers.

WITH QUAD HITCH, MECHANICAL SWIVEL AXLE B5QM14 – B5QM16


- » Mechanical swivel axle for riding on roads with hand pump
- » 3 tine bars
- » Mesh roller with screw conveyor
- » Powder-coated in red
- » Working width 1.45 m – 1.60 m



Designation	Width	Weight
B5QM14KR	1,45 m	185 kg
B5QM16KR	1,60 m	196 kg

WITH QUAD HITCH, HYDRAULIC SWIVEL AXLE B5QH14 – B5QH16


- » Hydraulic swivel axle for riding on roads
- » 3 tine bars
- » Mesh roller with screw conveyor
- » Powder-coated in red
- » Working width 1.45 m – 1.60 m



Designation	Width	Weight
B5QH14KR	1,45 m	185 kg
B5QH16KR	1,60 m	196 kg

WITH QUAD HITCH, ELECTRIC SWIVEL AXLE B5QE14 – B5QE16

- » Electric swivel axle for riding on roads
- » 3 tine bars
- » Mesh roller with screw conveyor
- » Powder-coated in red
- » Working width 1.45 m – 1.60 m



Designation	Width	Weight
B5QE14KR	1,45 m	185 kg
B5QE16KR	1,60 m	196 kg

FOR ARENA DRAG TYPES 4 – 5:


ARENA DRAG ACCESSORIES AND PARTS



RAIL BLADE PREMIUM

Premium rail blade with centered no-scuff wall wheel.

Designation	Width	Weight
B5HSRP	for 1.60 – 2.50 m	40 kg



RAIL BLADE

Rail blade for B5QM 12 / 14

Designation	Width	Weight
B5HSRS	for 1.25 – 1.45 m	10 kg



FRONT LEVELLER BAR

Designation	Width	Weight
B5VGS	for 1.60 – 2.50 m	25 kg



LEVELLING BLADE

Designation	Width	Weight
B5GB	for 1.25 – 1.45 m	14 kg



TINES

for sand and fleece / sand tracks

Designation	Weight
B5STZ	0.4 kg



TOP PERFORMANCE:

STAINLESS STEEL FEED WAGON



Configure online
now!




This sturdy, stainless steel feed wagon features divider, covers, and utensil box and will quickly become an indispensable around the farm and stables. The arrangement of the large ball-bearing wheels makes it easy to push even when fully loaded.



TRADITIONAL FW 40 – FW 60

- » 400, 500 and 600 litres, pneumatic-tyres
- » Utensil box, divider and two-part cover with boreholes for padlock

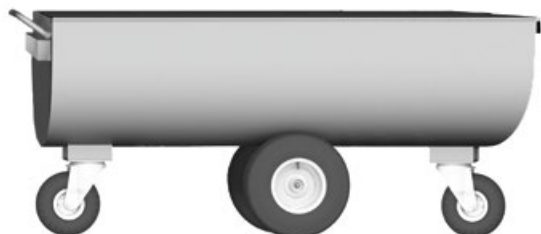

Designation	L	W	H	Weight
FW40	1.43 m	0.75 m	0.90 m	78 kg
FW50	1.80 m	0.75 m	0.90 m	96 kg
FW60	2.10 m	0.75 m	0.90 m	104 kg

PROFESSIONAL (BATTERY-POWERED) FW 40A – FW 60A



- » 400, 500 and 600 litres, pneumatic-tyres
- » With 24 V battery drive
- » 230 V charger
- » Utensil box, divider and two-part cover with boreholes for padlock



Designation	L	W	H	Weight
FW40A	1.50 m	0.75 m	0.90 m	115 kg
FW50A	1.87 m	0.75 m	0.90 m	140 kg
FW60A	2.10 m	0.75 m	0.90 m	145 kg

► STAINLESS STEEL FEED WAGON ACCESSORIES:

DIVIDER

Designation	Dimensions (WxH)	Weight
FWTW	0.69 x 0.46 m	3 kg

UTENSIL BOX

Designation	Dimensions (LxWxH)
FWUT	50 x 10 x 13 cm
FWUTG	50 x 14 x 26 cm / 31.4 cm

SWIVEL WHEEL

Designation	Description
SR	Swivel
SRB	Swivel wheel

TYRES

Designation	Description
Reifen	16 x 6.50 – 8 6PR
All other tyres/ wheels on request..	

ROOMY FARM TOOL:

STAINLESS STEEL MANURE CART



Configure online
now!



This sturdy wheeled container will quickly become indispensable on your farm. The cart's intake allows easy transport and unloading with the tractor or yard loader. The central arrangement of the large ball-bearing wheels makes it easy to push.



MANURE CART SK (2,400 L)

- » Stainless steel 2,400 litre tub,
pneumatic-tyres
- » Front and back swivel wheels

Designation	L	W	H	Weight
SK	2.32 m	1.30 m	1.55 m	214 kg



MANURE CART SKC (1,400 L)

- » Stainless steel 1,400 litre tub,
pneumatic-tyres
- » Front swivel wheels

Designation	L	W	H	Weight
SKC	1.42 m	1.30 m	1.55 m	179 kg



STAINLESS STEEL MANURE CART SKDE – SKCDE

- » Stainless steel cover
- » Opens front to back
- » Cover only opens 75%!

Designation	L	W	H	Weight
SKDE	2.32 m	1.30 m	1.60 m	264 kg
SKCDE	1.42 m	1.30 m	1.60 m	254 kg



MANURE CARE WITH TARPAULIN COVER SKDP –SKDCP

- » Cover made of stainless steel frame
with tarpaulin cover (grey)
- » Opens front to back

Designation	L	W	H	Weight
SKDP	2.32 m	1.30 m	1.55 m	194 kg
SKDCP	1.42 m	1.30 m	1.55 m	191 kg



FULLY ACCESSIBLE:
MANURE CONTAINER



Configure online
now!



This sturdy manure container solves the problem of full wheelbarrows on the farm. Intake allows easy transport and unloading with the tractor or yard loader.



MANURE CONTAINER
MC (STAINLESS STEEL) / MCS (STEEL)

Designation	D	W	H	Weight
MC	1.65 m	1.62 m	0.70 m	165 kg
MCS15	1.40m	1.50m	0.73 m	235 kg
MCS20	1.40m	2.00m	0.73 m	255 kg



HOLDS ALL TYPES OF BALES:

BALE CARRIER TRADITIONAL



Configure online
now!



This sturdy attachment is made of powder-coated steel tube and holds both rectangular and round bales.

The central arrangement of the large pneumatic tyres allow for easy pushing.



MANUAL NOT BRAKED GBWM20 – GBWM25

- » For rectangular and round bales
- » Holds up to 1,000 kg
- » Large pneumatic tyres
- » Powder-coated in green

Designation	Dimen. (L x W)	Weight	Turntable
GBWM20	2.00 x 1.00 m	97 kg	no
GBWM25	2.50 x 1.00 m	102 kg	no



MANUAL NOT BRAKED GBWMRB20 – GBWMRB25

- » For rectangular and round bales
- » Removable turntable
- » Bearing load up to 1,000 kg (turntable: 500 kg)
- » Large pneumatic tyres
- » Powder-coated in green

Designation	Dimen. (L x W)	Weight	Turntable
GBWMRB20	2.00 x 1.00 m	101 kg	yes
GBWMRB25	2.50 x 1.00 m	106 kg	yes



MANUAL BRAKED GBWMB20 – GBWMB25

- » For rectangular and round bales
- » Holds up to 1,000 kg
- » Fixing brake on swivel wheel
- » Large pneumatic tyres
- » Powder-coated in green

Designation	Dimen. (L x W)	Weight	Turntable
GBWMB20	2.00 x 1.00 m	98 kg	yes
GBWMB25	2.50 x 1.00 m	103 kg	yes



MANUAL BRAKED GBWMBRB20 – GBWMBRB25

- » For rectangular and round bales
- » Bearing load up to 1,000 kg (turntable: 500 kg)
- » Fixing brake on swivel wheel
- » Large pneumatic tyres
- » Powder-coated in green

Designation	Dimen. (L x W)	Weight	Turntable
GBWMBRB20	2.00 x 1.00 m	102 kg	yes
GBWMBRB25	2.50 x 1.00 m	107 kg	yes



► ACCESSORIES FOR BATTERY-POWERED BALE CARRIER TRADITIONAL:

TURNTABLE

Designation	Diameter	Weight
DT 13	1.30 m	43 kg

DRAWBAR

Designation	Info	Weight
GBWD	With traction eye or ball head	25 kg

ROUND BALE HOLDER

Designation	Weight
RBH	6 kg

BATTERY-POWERED:

BALE CARRIER PROFESSIONAL



Configure online
now!



This sturdy attachment is made of powder-coated steel tube and holds both rectangular and round bales. Its high-torque drive and simple operation let you transport your straw or hay to its destination effortlessly.



WITHOUT TURNTABLE GBWAA20 – GBWAA25

- » For rectangular and round bales
- » With 24V battery drive & 230V charger
- » Holds up to 1,000 kg
- » Large pneumatic tyres
- » Powder-coated in green

Designation	Dimensions (LxW)	Weight
GBWAA20	2.00 x 1.00 m	191 kg
GBWAA25	2.50 x 1.00 m	196 kg



TURNTABLE-READY GBWAARB20 – GBWAARB25

- » For rectangular and round bales
- » With 24V battery drive & 230V charger
- » Load capacity to 500 kg on turntable
- » Load capacity to 1000 kg without turntable
- » Large pneumatic tyres
- » Powder-coated in green

Designation	Dimensions (LxW)	Weight
GBWAARB20	2.00 x 1.00 m	195 kg
GBWAARB25	2.50 x 1.00 m	200 kg



► ACCESSORIES FOR BATTERY-POWERED BALE CARRIER TRADITIONAL:

TURNTABLE

Designation	Diameter	Weight
DT 13	1.30 m	43 kg

ROUND BALE HOLDER

Designation	Weight
RBH	6 kg

► ACCESSORIES FOR ALL BALE CARRIERS, FEED WAGON:

SWIVEL WHEEL

Designation
SR

TYRES

Designation	Description
Tyres / wheels	16 x 6.50 – 8 6PR
All other tyres / wheels on request.	

DON'T GUESS, WEIGH IT:

BALE CARRIER WITH SCALE



Configure online
now!



This sturdy attachment is made of powder-coated steel tube and holds both rectangular and round bales. The central arrangement of the large pneumatic tyres allow for easy transport of bales.



BALE CARRIER WITH SCALE
GBWMWA20 – GBWMWA25

- » For rectangular and round bales
- » Holds up to 1,000 kg
- » Large pneumatic tyres
- » Powder-coated in green
- » Also comes battery-powered!

Designation	Dimensions (LxW)	Weight	Turntable
GBWMWA20	2.00 x 1.00 m	135 kg	no
GBWMWA25	2.50 x 1.00 m	140 kg	no



SCALE

- » For rectangular and round bales
- » Holds up to 1,000 kg
- » 100 g increments
- » Large pneumatic tyres
- » Powder-coated in green
- » Length 2.00 m – 2.50 m



HOP ON FOR THE RIDE:

RIDING BALE CARRIER



Configure online
now!



This sturdy attachment is made of powder-coated steel tube and holds both rectangular and round bales. Simply ride on the platform whilst transporting your bales to wherever you need them.



RIDING BALE CARRIER

GBWAASF25 – GBWAASFRB25

- » For rectangular and round bales
- » With 24V battery drive & 230V charger
- » Load capacity to 1,000 kg without turntable
- » Loading capacity on optional turntable max. 500 kg
- » Large pneumatic tyres
- » Powder-coated in green
- » Riding platform

Designation	Dimensions (LxW)	Weight	Turntable
GBWAASF25	2.50 x 1.00 m	200 kg	no
GBWAASFRB25	2.50 x 1.00 m	210 kg	yes



PRACTICAL FOR DAILY WORK:
SADDLE CART



Configure online
now!



This sturdy, attractive and versatile saddle cart has room for everything horse and rider need in their daily work. The saddle cart is easily pushed even when fully loaded and has rounded edges for safe handling.



SADDLE CART
SW3

- » Saddle cart with three wheels
- » Manoeuvrable and extremely versatile
- » With various compartments and bit holder
- » Bucket and grooming box
- » Pneumatic tyres
- » Powder-coated in green

Designation	H	W	D	Weight
SW3	1.01 m	0.95 m	0.60 m	28 kg



PERFORMANCE PERFECTLY IN VIEW:
RIDING ARENA MIRROR



Configure online
now!



The riding arena mirrors are perfectly tailored to the requirements of riding and can be used both indoors and outdoors. Their high material and the quality of workmanship makes them excellent control instruments during training. The optional mirror cover is easy and safe to use and clean.



INTERIOR MIRROR

Mirror dimension (W x H)	external dimensions (W x H)	Number Mirror elements	Mirror cover
120cm x 180/200cm	132cm x 192/212cm	1	yes
150cm x 180/200cm	162cm x 192/212cm	1	yes
200cm x 180/200cm	212cm x 192/212cm	1	yes
250cm x 180/200cm	262cm x 192/212cm	1	yes
300cm x 180/200cm	312cm x 192/212cm	1	yes
400cm x 180/200cm	412cm x 192/212cm	1	yes
500cm x 180/200cm	512cm x 192/212cm	1	yes
588cm x 180/200cm	600cm x 192/212cm	1	yes
2000cm x 180/200cm	2012cm x 192/212cm	5	yes

Further dimensions and colors on request. (Standard color: light oak)

OUTSIDE MIRROR (WOOD TYPE: MERANTI)

Mirror dimension (W x H)	external dimensions (W x H)	Number Mirror elements	Mirror cover
120cm x 200cm	132cm x 212cm	1	yes
200cm x 200cm	212cm x 212cm	1	yes
300cm x 200cm	312cm x 212cm	1	yes
400cm x 200cm	412cm x 212cm	1	yes
480cm x 200cm	492cm x 212cm	1	yes

Further dimensions and colors on request.

PERFORMANCE ADVANTAGES

- » Made in Germany, excellent quality
- » 30 years of experience in construction and assembly of riding arena mirrors
- » glued wooden frame made of spruce, renewable raw material
- » Miralite® Pure 6 mm crystal glass, pollutant-free back varnish
- » almost distortion-free mirror image, for precise control
- » Shatter protection film, minimized the risk of injury
- » Insulation, made of PU rigid foam

Of course we will deliver and install your mirror on request.

Your mirror will be made individually for you.



AUTOMATIC FEEDER MADE OF STAINLESS STEEL



The automatic feeders provide your horses with species-appropriate care, while also keeping an eye on profitability. Horses are by nature permanent eaters. Small rations of feed distributed throughout the day prevent jealousy, greed and stress among the horses and prevent the feed from being gobbled down too quickly. Colic, constipation, indigestion and stomach ulcers are just a few examples of the possible consequences of improper feeding.



FEEDER MADE OF STAINLESS STEEL FA33 – FA42

» incl. fastening material for bars




Designation	Volume	Dimen. (WxHxD)
FA33	33 L	45 x 70 x 15
FA45	45 L	45 x 90 x 15
FA65	65 L	42 x 75 x 34
FA42	2 x 21 L,	60 x 70 x 15

2 separate reservoirs

AUTOMATIC FEEDER CONTROL FAST1 – FAST3

- » Timed allocation of individual portions
- » Up to 51 individual servings per day
- » Serving size can be allocated to the exact gram
- » Up to 100 feeder individually controllable
- » Feeder can be individual deactivated
- » Due to an additional function, the machines completely trickle-free
- » Empty warning
- » Fuse failure warning
- » Convenient operation via touch display
- » Horse names can be stored in the menu for a clear assignment of the portions

Designation	Dimen. (WxHxD)
FAST1	32 x 39 x 15
FAST2	33 x 39 x 15
FAST3	40 x 50 x 18

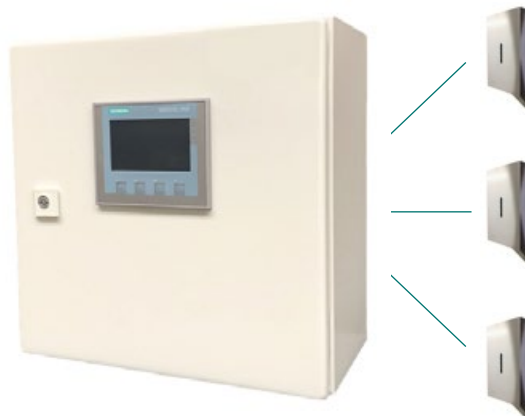

AUTOMATIC FEEDER CONTROL FASTAPP

- » Control and monitor your feed machines via smartphone, tablet or PC
- » Only in connection with control FAST2 and FAST3



QUALITY GALORE:

STAINLESS STEEL FEED TROUGH



Configure online
now!



This trough's quality workmanship and rounded edges prevent injuries to humans and animals and minimise feed fallout during feeding. With predrilled holes for mounting on the wall or on a rotating trough in the box door.



STAINLESS STEEL FEED TROUGH

- » Feed trough made of stainless steel
- » Robust material (1.5 mm)
- » Durable
- » Semi-circular shape for wall mounting
- » Can be mounted to a revolving trough
- » Pre-drilled holes for mounting
- » First-class workmanship
- » Secure round tube processed on the upper edge
- » Drain opening for cleaning
- » Hygienic
- » No plasticizers (such as in plastic troughs)

Designation	H	W	D	Weight
STAINLESS STEEL FEED TROUGH	18.5 cm	50 cm	35 cm	5.6 kg






Configure online
now!



Or horses are getting only a minimum of valuable natural sunlight due to stabling, lack of pasture and exercise in indoor arenas. Remedy this problem with a Summerwind solarium.

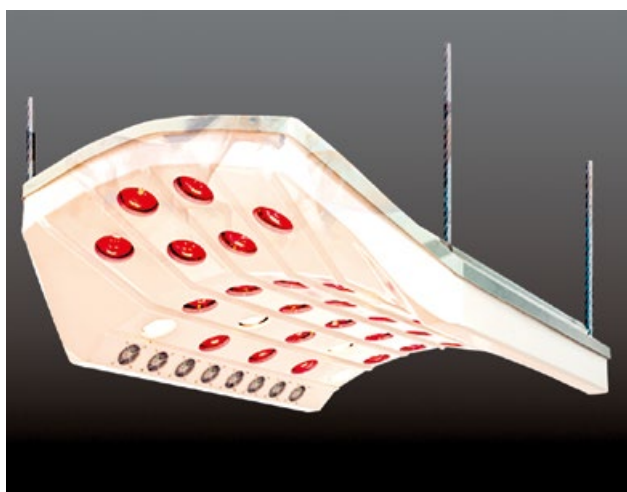

HIGH-PERFORMERS AREN'T THE ONLY HORSES THAT NEED SUN:

Leisure horses should also be exposed to the performance-enhancing and health-promoting effects of light, because even turnout no longer provides them with adequate sunshine.

JUST 20 MINUTES A DAY:

... is enough to bring all the benefit a solarium offers. This daily dose of sunshine pays for itself – because you'll be saving on medications, vet visits, and care costs.

HORSES IN TRAINING AND COMPETING IN RACES OR SHOWS:

Used as an additional preparation for work, Summerwind solariums activate circulation, thus providing a performance boost. And the animal should be given a solarium treatment immediately following work as well, as it calms and brings complete relaxation.

DURATION:

For minimum health maintenance and sufficient resilience, give your horse three applications / sessions per week. To activate all life processes in the organism, provide daily sessions.

The same applies to therapeutic measures. Horses in training or competition benefit from treatments before and after work.

Designation & model	Equipment	Special equipment	
SUMMERWIND LIGHT II SWL2	» Consisting of 2 modules » 10 IR lamps, 250 Watt » 4 fans » Timer switch » Control unit	» Integrated lift with two mounting points » 2 UV lamps, 300 Watt (incl. separate control) » Coin operation	
SUMMERWIND LIGHT III SWL3	» Consisting of 3 modules » 15 IR lamps, 250 Watt » 6 fans » Timer switch » Control unit	» Integrated lift with four mounting points » 4 UV lamps, 300 Watt (incl. separate control) » Coin operation	
SUMMERWIND LIGHT IV SWL4	» Consisting of 4 modules » 20 IR lamps, 250 Watt » 8 fans » Timer switch » Control unit	» Integrated lift with four mounting points » 4 UV lamps, 300 Watt (incl. separate control) » Coin operation	
SUMMERWIND DE LUXE SWD	» 30 IR lamps, 250 Watt » 18 fans & air jets » Integrated air circulator (patent-protected) » Timer switch with programme » Emergency shut-off » Control unit	» Integrated lift with height adjustment » 4 UV lamps, 300 Watt (incl. separate control) » Coin operation	
SUMMERWIND PREMIUM SWP	» 36 IR lamps, 250 Watt » 16 fans » Integrated air circulator (patent-protected) » Timer switch with programme » Emergency shut-off » Control unit	» Integrated lift with height adjustment » 4 UV lamps, 300 Watt (incl. separate control) » Coin operation	

INNOVATION FOR THE MODERN RIDING STABLE:

HEATED HORSE RUG DRYER



Configure online
now!




Its perfect form and heating feature will have your rug dry in just a few hours. The rug frame also folds up so that you can use the dryer to dry saddle pads and horse boots. This will not cause any contamination from rust. After 3 hours, the system switches off automatically.



HORSE RUG DRYER

- » No more bad-smelling rugs
- » Rugs dry in just hours, automatic shut-off after 3 hours
- » Saddle pads, brushing boots and fetlock boots dry within minutes
- » Extends the life of your equipment, saves time and money
- » No damage to water-resistant coatings
- » Use with or without heating
- » Robust stainless steel
- » Filled with patented, biological, non-toxic liquid
- » Quickly reaches operating temperature
- » Safe down to minus 25 °C
- » Ergonomic use through folding frame
- » Ergonomic use through turning the frame to the right or left

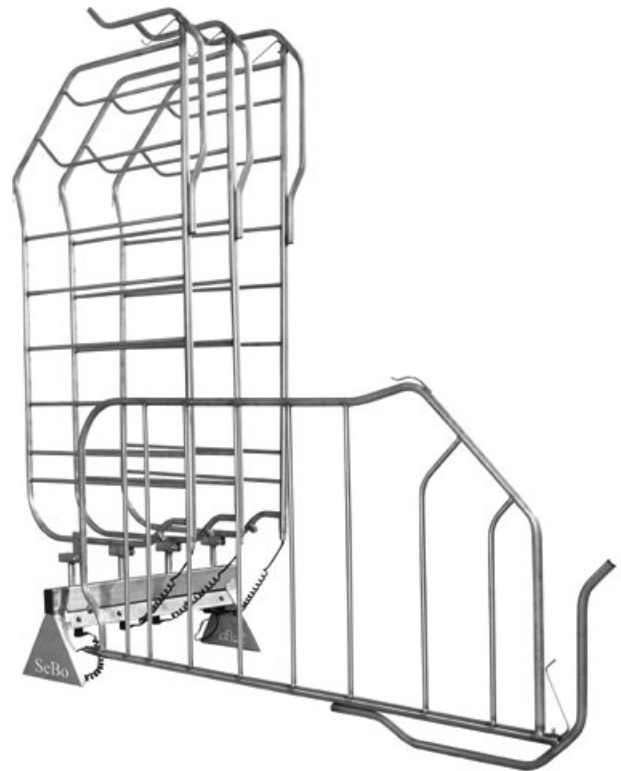

Designation	H	W	D
DT4 (standing)	226 cm	87.5 cm	97 cm
DT4 (extended)	97 cm	87.5 cm	206 cm
DT1 (standing)	226 cm	30 cm	97 cm
DT1 (extended)	97 cm	30 cm	206 cm



KEEPS ORDER IN THE STABLE:

BLANKET HOLDER



Configure online
now!



Drying sweaty blankets is no problem with this blanket holder. It can be folded down and the blanket can therefore be placed ergonomically.

Through the space-saving arrangement, the whole stable benefits.



HORSE BLANKET HOLDER

- » Blankets dry better
- » Extends the life of your equipment, saves time and money
- » unheated
- » high-quality galvanized
- » Ergonomic use by unfolding the frame
- » easy lifting of the occupied holder with support by a gas spring
- » Ergonomic use by turning of the frame to the left or right
- » Order in the stable
- » everyone can have their own place
- » space saving



Designation	Height (H)	Depth (D)
DH	185cm	95cm
	folded down:	208cm

THE COMPLETE SYSTEM:

CIRCULAR FEEDER



Configure online
now!



This sturdy feeder is made of powder-coated steel tube and has room for 15 animals. Our scope of services provides you with a complete system that does not require any costly additional equipment. Assembly required.



CIRCULAR FEEDER

RR20

- » 15 feeding places
- » Fully hot-galvanised
- » Assembly required

Designation	Ø	H	Weight
RR20	2.10 m	2.50 m	330 kg




► CIRCULAR FEEDER ACCESSORIES:

HAY NET (SQUARE NET)

RRHN45 – RRHN60

- » For round and rectangular bales
- » Includes all installation materials

Design.	L x W x H	Weight	Mesh size
RRHN45	1.60 x 1.60 x 180 m	8 kg	45 mm
RRHN60	1.60 x 1.60 x 180 m	8 kg	60 mm

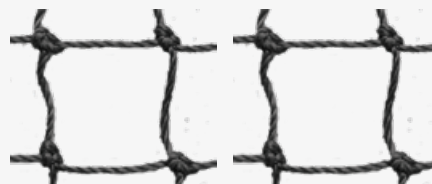

FEED COVER

RRFD10

- » For feeding concentrates in the feeder
- » Keeps the concentrates from sliding into the middle of the feeder
- » Galvanised steel
- » Includes all installation materials

Designation	Ø	H	Weight
RRFD10	1.00 m	0.12 m	15 kg



E-TRANSPORTER WITH POWER:

TEMAX BATTERY-POWERED DUMPER



Configure online
now!



The TeMax features a high-torque electric drive for extreme tractive power, taking on gradients of up to 40% quietly and with great stamina. Suitable for garden and landscaping businesses, horse farms, agriculture, construction and demolition companies as well as for working in tight spaces.



- » Extensive range of attachments and add-ons for flexible use year-round.
- » Maintenance-free battery and drive technology.
- » The 50 Ah batteries allow for 8 hours and the 75 Ah batteries for up to 15 hours of continuous operation.
- » Extra narrow construction; compact dimensions for narrow paths and gates; small turning radius.
- » Energy-saving; no exhaust fumes or noise emissions.
- » Stable transport; infinitely adjustable Speed; smooth start-up; maximum safety even on gradients.
- » Minimal operating costs (approx. 0.15 euros per day of operation); no maintenance costs.
- » "All-rounder", reducing high cost of multiple vehicles; cost-efficient and time-efficient work through high loading capacity.
- » Promotes user health by helping to prevent sore muscles and backs. Height-adjustable steering.
- » Extremely easy to operate.

Motor:	24 V DC motor (1250 W) with differential gear
km/h:	6 km/h forwards, 3 km/h backwards
Loading capacity:	max. 350 kg
Gradient / slope:	max. 40 %
Net weight:	between 101 kg and 128 kg (without trough, depending on fittings)
Batteries:	2 lead gel batteries 12 V (50 Ah or 75 Ah, rechargeable), connected to 24 V
Protection class / Operation temperature:	IP 54 / -10°C to + 40°C
Charger 230 V / 24 V:	4 A (for 50 Ah) or 8 A (for 75 Ah)
Energy consumption:	< 1 kWh for one battery charge (approx. 15 h of continuous operation) < 0.5 Wh during trickle charging < 0,2 Wh in standby
Tyres:	4.80/4.00-8 turf tyres or 4.00-8 agricultural tyres or 16 x 6.50-8 wide agricultural tyres

► ACCESSORIES FOR TEMAX:



140-LITRE-TROUGH



RIDE-ON TRAILER



DUMPING TROUGH FOR LIGHT MATERIAL (300L)



PLATFORM




XL-DUMPING THROUGH (500L)



TAILBOARD FOR PLATFORM



MULTI-LOADER



SNOW BLADE WITH FRONT LIFTING MECHANISM

EFFORTLESS COLLECTION OF MUCK:
PADDOCK CLEANER



Configure online
now!



The Paddock Cleaner is a time saving, efficient and thanks to it's stable construction, long-lasting helper when cleaning your paddocks and pastures. The high performance brush, powered by powerful Honda Motors, classic as a combustion engine or ultra modern in the



electric version, to transport horse droppings, leaves or other rubbish into the 550 / 700 liter hopper, which can be easily emptied thanks to the sophisticated mechanism. Whether pulled by a wheel-loader, ATV or another vehicle, the Paddock Cleaner works neatly and cleanly at a working width of 1.20m or 1.50m.

PADDOCK CLEANER PC120 / PC150 WITH RELIABLE HONDA MOTOR GX200

- » Engine GX200 Honda with Electric Start
- » Hopper 550 / 700 liter
- » Heavy duty brushes for longevity
- » 8 quality brushes, individually replaceable
- » Remote electric empty hopper
- » 8 quality steel tines to help break up stubborn dung piles.
- » Large diameter tyres
- » stable construction for longevity
- » Optionally with towing eye or ball hitch
- » Working width 1.20 m / 1.50 m

Designation	Width	Weight
PC120	1.76 m	300 kg
PC150	2.06 m	350 kg



PADDOCK CLEANER PC120E WITH POWERFUL EGX HONDA ELECTRIC ENGINE



- » Powerful eGX Honda battery powered engine
- » Hopper 550 liter
- » Heavy duty brushes for longevity
- » 8 quality brushes, individually replaceable
- » Emptying via simple hand winch
- » 8 quality steel tines to help break up stubborn dung piles.
- » Large diameter tyres
- » stable construction for longevity
- » Optionally with towing eye or ball hitch
- » Working width 1.20 m
- » High Speed Battery Charger Included
- » Optional extra battery available

Designation	Width	Weight
PC120E	1.76 m	300 kg



NEW DIRECTIONS:

THE MOBILE PADDOCK



Configure online
now!



Our Mobile Paddock is made of sturdy tube pipe with no sharp edges or corners. The individual round tube panels can be arranged in any number to form a closed paddock.



This allows you to make use of nearby grassy areas and provide your horses with additional turnout.

MOBILE Paddock

- » Sturdy tube construction with no sharp edges or corners
- » Expandable
- » Individual panel length approx. 6.00 m
- » Height approx. 1.50 m
- » Separate panel for entry /exit
- » Puncture-proof wheels
- » Space-saving storage
- » Can be used year-round



SECURE INTERLOCKING GRIDS:


EQUIGROUND Paddock GRIDS



Order directly now!



Whether paddocks, riding areas, parking lots or access paths – the EQUIGROUND paddock grids are versatile and ensure optimal conditions, regardless of the weather and ground conditions. Horses, riders and stable owners alike benefit from a clean, firm and non-slip surface.

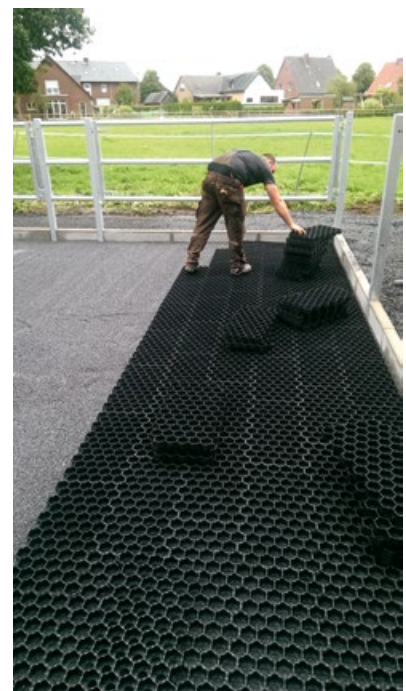

EQUIGROUND

Trennschichtgitter für den perfekten Paddock

- » Easy to install
- » Secure interlocking grids
- » Impact-resistant synthetic material
- » Maximum water permeability
- » Recyclable
- » Slabs / m²: 5.455
- » Colour: Black
- » Secure connection: hooking system
- » Pallet contents: 30.830 m² = 168 slabs
- » Pallet weight: approx. 180 kg
- » Material: HDPE-PP

Designation

H

W


D

EQUI

3.8 cm

64 cm

33 cm

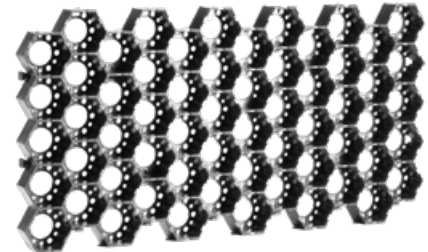

EQUIGROUND construction on sub-base



FOOTING (APPROX. 10 CM)

e.g.: sand / additives

EQUIGROUND

Footing grid fill height: approx. 3 to 3.5 cm

Fill: e.g. crushed stone (grain size 2 to 5 mm) or similar

LEVELLING COURSE

approx. 3 to 5 cm; e.g. crushed stone
(grain size 2 to 5 mm)

SUB-BASE

approx. 15 cm; e.g. gravel (2 to 45 mm grain size)
or similar (the sub-base must be strong and
water-permeable)

NATURAL SOIL

100 %
PREMIUM
QUALITÄT

100 %



recyclingfähig

100 %



expertise

EQUIGROUND construction without sub-base



FOOTING (APPROX. 10 CM)

e.g.: sand / additives

EQUIGROUND

Footing grid fill height: approx. 3 to 3.5 cm

Fill: e.g. crushed stone (grain size 2 to 5 mm) or similar

NATURAL SOIL

PROTECTION AND WELL-BEING:

BELMONDO RUBBER FLOORING



Configure online
now!



BELMONDO rubber flooring can bring a significant reduction in costs and work time. Straw use, storage costs, and manure volume are all considerably reduced. Less bedding means less dust, which makes for a healthier stable climate.



RUBBER FLOORING

- » Improved slip resistance
- » Proper degree of softness to support the hoof mechanism and protect tendons and joints
- » Heat and noise insulation
- » Robust, long-lasting, recyclable
- » Easy installation with practical interlocking mats
- » Mats can be easily removed or replaced (when moving, cleaning, etc.)
- » Solid, vulcanized rubber that repels liquids
- » Suitable for all types of horseshoes
- » Suitable for vehicle traffic (excluding Walkway)



Designation	Furnishing	H	W	D	Weight
BASIC	Box / lying area	1.8 cm	100 cm	100 cm	ca. 20 kg / m ²
CLASSIC	Box / lying area	1.8 cm	100 cm	100 cm	ca. 21 kg / m ²
TREND	Box / lying area	2.8 cm	100 cm	100 cm	ca. 22 kg / m ²
KINGSIZE COVER	Box / lying area	-	-	-	-
RODEO	Wall	1.1 cm	130 cm	350 cm	ca. 14 kg / m ²
WALKWAY	Walkway	1.1 cm	100 cm	100 cm	ca. 13 kg / m ²
WALKPRO	Walkway (washing station)	1.6cm	100 cm	100 cm	ca. 18 kg / m ²
Paddock	Washing station, box paddocks, walkways	2.4 cm	100 cm	100 cm	ca. 23 kg / m ²
HORSEWALKER	Horse walkers	-	-	-	-

PROTECTION AND WELL-BEING:


RUBBER COBBLESTONE FLOORING



Configure online
now!



Komfortex® products contribute to the health and well-being of your horses. The surfaces feature excellent thermal insulation in both indoor and outdoor areas. These floorings are resistant to frost, urine, and the elements and are also water permeable.

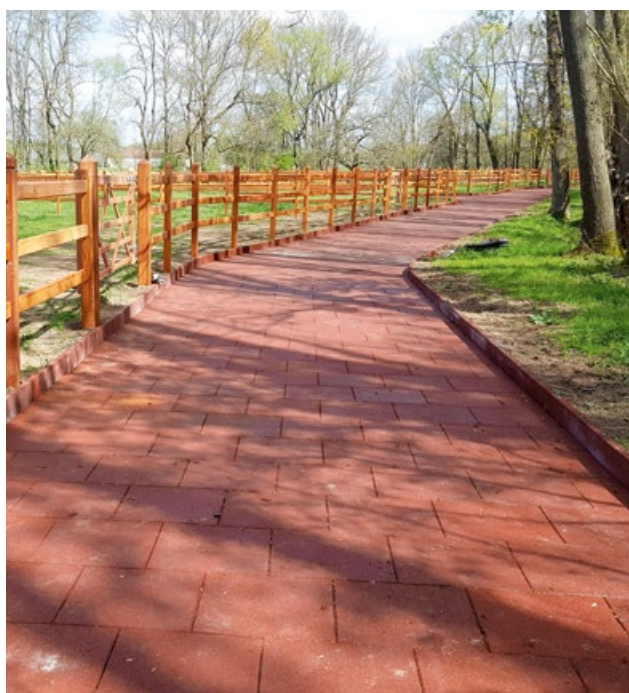

RUBBER COBBLESTONE FLOORING

- » Proven quality
- » Secure footing
- » High slip resistance
- » In a range of colours to meet your needs
- » Easy to install
- » Long-lasting
- » Absorbs sounds
- » Long-lasting urine resistance
- » Environmentally friendly (TÜV-tested substances)
- » Water permeability
- » Withstands weather and frost
- » High dimensional stability (with elastic panels through connectors)

Designation	Application	Substrate Properties	L x W x H
ELASTIKPLATTE30	Paddocks, open stables, tying and washing stations, boxes with drainage	on concrete or asphalt foundations	50 x 50 x 3 cm
ELASTIKPLATTE40	Paddocks, open stables, tying and washing stations, boxes with drainage	also on stable, compact substrate	50 x 50 x 4 cm
ELASTIKPLATTE40	Paddocks, open stables, tying and washing stations, boxes with drainage	also on stable, compact substrate	100 x 50 x 4 cm
DECOR (STONE LOOK)	Stable alleys, tying and washing stations, paddocks	also on stable, compact substrate	50 x 50 x 4 cm
H-STEIN (STONE LOOK)	Stable alleys, tying and washing stations, paddocks	also on stable, compact substrate	50 x 50 x 4 cm
SAFE/HAMMERSCHLAG	Open stalls and walkways with steep inclines	also on stable, compact substrate	50 x 50 x 4 cm
ELASTIKPFLASTER	Horse walkers, walkways, tying and washing stations	on prepared sub-base	20 x 16,5 x 4,3 cm
SOFTBORDER	Border for rubber flooring on unpaved sub-soil	Installation	100 x 5 x 25 cm
REITPLATZEINFASSUNG	Riding arena on existing wood or concrete foundations	Suitable foundation	100 x 14,9 x 8 cm
EDGE PROFILE 30/10 MM	Prevents trip hazards around areas of e.g. Elastikplatte30	adhered/screwed on concrete or asphalt sub-base	100 x 25 x 3/1 cm
1 PAIR EDGE-CORNER PROFILE 30/10 MM	Prevents trip hazards around areas of e.g. Elastikplatte30	adhered/screwed on concrete or asphalt sub-base	100 x 25 x 3/1 cm
EDGE PROFILE 40/10 MM	Prevents trip hazards around areas of e.g. Elastikplatte40	adhered/screwed on concrete or asphalt sub-base	100 x 25 x 4/1 cm
1 PAIR EDGE-CORNER PROFILE 40/10 MM	Prevents trip hazards around areas of e.g. Elastikplatte40	adhered/screwed on concrete or asphalt sub-base	100 x 25 x 4/1 cm
WANDTRITTSCHUTZ8 (ROLL)	Box wall (adhered or screwed)	robust, clean, dry, and dust-free	1500 x 150 x 0,8 cm
WANDTRITTSCHUTZ10 (ROLL)	Box wall (adhered or screwed)	robust, clean, dry, and dust-free	1200 x 150 x 1,0 cm
WANDTRITTSCHUTZ12 (ROLL)	Box wall (adhered or screwed)	robust, clean, dry, and dust-free	1000 x 150 x 1,2 cm

LA BUVETTE DUMPING WHEELBARROW



Configure online
now!



The advantages of our reinforced plastic wheel rims: Resilient and non-wearing. No flat tyres from wear. Reinforced tyres with Ø 400 mm can be fitted to our rims. They allow optimum handling.



LA BUVETTE LB33 – LB60

- » Tube constructed, completely galvanized
- » No edges or corners
- » Prevents injuries to humans and animals
- » Stable air tyres for easy navigation and turns
- » With double-walled welded rims made of high-density polyethylene; stainless steel guard
- » Solid, sturdy frame
- » Load rests completely on the axle when travelling
- » Easy to empty

Designation	L	H	W
LB33	173 cm	81 cm	86 cm
LB60	205.6 cm	98.2 cm	94.5 cm



► LA BUVETTE ACCESSORIES:

EXTRA-WIDE TYRES

Total width increased by approx. 10 cm

Designation	Tyres
LB33BR	16 x 6.50 – 8 6PR
LB60BR	16 x 6.50 – 8 6PR

KNEILMANN FARM AND STABLE EQUIPMENT:
PITCHFORK



Configure online
now!



The original Swedish-style pitchfork made of robust plastic, almost unbreakable, extremely flexible polycarbonate designed for the hardest of uses, extra-sharp and angled tines for easy manure pick-up. Lightweight and easy to use for long periods.



Can be used in the stable, around the garden, or practically anywhere. Easily move leaves, fallen fruit, etc. from the ground into a wheelbarrow or onto the compost pile without bending down. Made of special, robust material to ensure many years of enjoyment.

Colour	Item	L x W (cm)
black	10	150 x 40
blue	10	150 x 40
hot pink	10	150 x 40
black	20	150 x 40
blue	20	150 x 40
hot pink	20	150 x 40



NONSTOP MOWING:

ZAUNKÖNIG POST MOWER



Configure online
now!




In combination with tractors or wheel-loaders, this mower can cut vegetation under fences and around posts of all thicknesses in no time – NONSTOP. The Zaunkönig can be attached to different types of pull vehicles such as tractors, wheel-loaders, etc., either front-mounted or connected to the rear hydraulics.



The heart of the Zaunkönig is the trimmer head spider, around which are mounted three arms, each with a pivoted trimmer head. The trimmer head is positioned to the side of the tractor and can be guided under the fence due to its flat construction.

ZAUNKÖNIG

Designation	ZK
Net weight	ca. 270 kg
Minimum oil usage	33 l/min
Max. permissible oil usage	45 l/min
Working width	ca. 950 mm
Transport width	ca. 1470 mm
Transport height	ca. 1260 mm
Max. hydr. system pressure	200 bar
Speed	up to 4 km/h
Hydraulic connections	two control devices <u>and</u> a pressureless one rewind

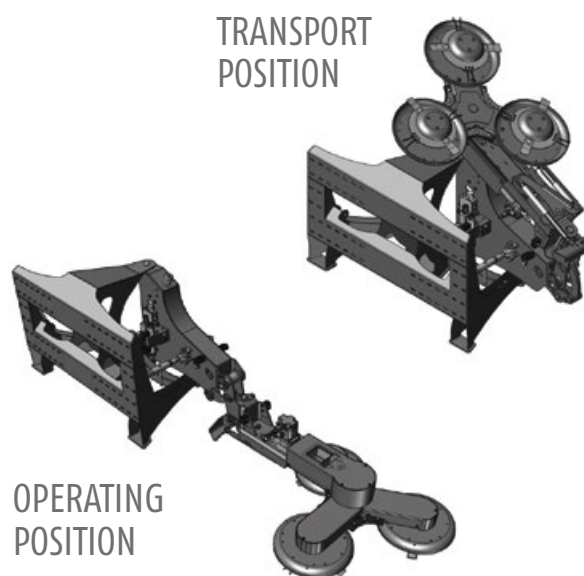

► ACCESSORIES FOR ZAUNKÖNIG:

MOUNTING FRAME

Designation	Compatible with:
ABR	see page 73

ELECTRIC CONTROL

Designation	Requires 3-prong 12 V socket (on the driver's stand)
EBE	only one control device <u>and</u> one pressureless rewind

► ADDITIONAL FITTINGS FOR ZAUNKÖNIG:

ZAUNKÖNIG SOLAR

Designation	Info:
ZKS	with additional plastic guide rails on the cutting discs

ZAUNKÖNIG COMMUNAL

Designation	
ZKK	with additional plastic guide rails on the cutting discs and a swath curtain

FOR A STRONG CONNECTION:
MOUNTING FRAME



WEIDEMANN
designed for work

Schäffer
PARTS & SERVICE



**WACKER
NEUSON**



JOHN DEERE



CLAAS

VOLVO

KOMATSU®

Designation

ABR	3-point mounting frame, cat. I / II
	Ahlmann AF 60
	Strut for AF60 (Manure Cart only)
	Ahlmann AX70
	Atlas AR35
	Atlas AR45/55/65/70/80/85
	Avant
	Bonatti MP 3/S
	Caterpillar 907
	Claas Scorpion
	Claas Targo
	EURO attachment, Manure Cart
	EURO attachment, Zaunkönig
	Fiori AL450
	A-frame quick hitch cat. 0, communal
	A-frame quick hitch cat. 1,2,3
	Giant
	Large BM
	Hauer
	JCB 520
	JCB Q-fit
	John Deere communal
	Mount plate Size 3
	Komatsu WA 65/70
	Kramer 350

Kramer 680T
Kubota 520
Liebherr L506 / 507 / 508 / 509 P-Kinem.
Liebherr L506 / 507 / 508 / 509 Z-Kinem.
Manitou
Merlo ZM2
Merlo ZM3
MZ Imer
Schäffer wheel loader WS KR
Schäffer double hook
Schäffer square
Schäffer square 700mm
Skid Steer
Striegel
Terex TL100
Thaler
Tremo Euro 5 Multicar
Trima (SMS)
Veto
Volvo L30/32/35Z
Weidemann HT-HV short, Zaunkönig
Weidemann HT-HV long, Manure Cart
Weidemann HT-HV large
Weidemann mechanical
Zettelmeyer ZL 402
... other models on request



TECHNIK FÜR LAND UND HOF



KNEILMANN GERÄTEBAU GMBH

Amelsbürener Str.5
59387 Ascheberg
Deutschland

T + 49 2593 95 20 95-0
F + 49 2593 95 20 95-99

info@kneilmann-geraetebau.de
www.kneilmann-geraetebau.de/en

Write to us
via WhatsApp



Just scan!

YOUR KNEILMANN DEALER